



HJT Solar Module

KEY FEATURES



Excellent performance in low-light environments



High quality junction box and connector systems



100% inspection, to guarantee the reliability of solar systems



More energy yield from the backside



Stronger water resistance, greater air impermeability to extend module lifespan



Enhanced safety by excellent fire resistance




Perfect for sandy, snowy and high latitude regions



Lower operating temperature, more reliable




Cutcell, Less internal power loss, Less mismatch loss

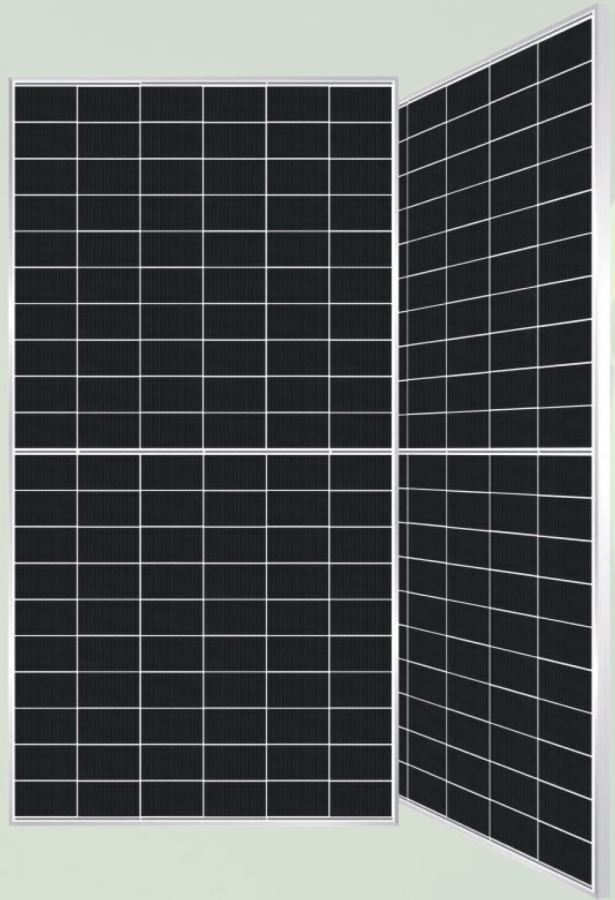


GSPV-M12/120H-625W-645W 625~645 Watt

210mm 120cells Bifacial HJT Half Cell Double-glass Solar Module

BLACK *BLACK FRAME/BLACK BACK-SHEET PRODUCTS ARE AVAILABLE UPON REQUEST

➤ **15** Years Product Warranty
30 Years Linear Power Warranty

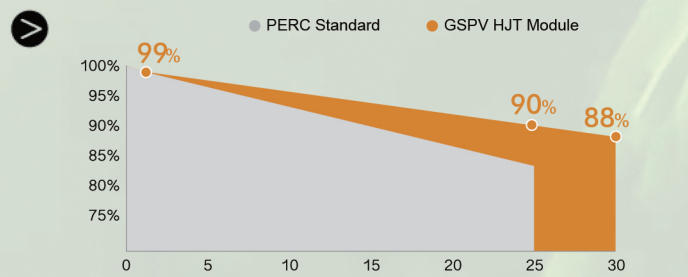
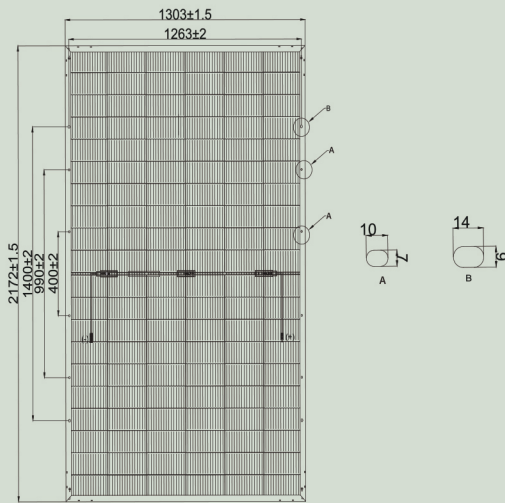


IEC61215
IEC61730
UL61215
UL61730



Engineering Drawings

Unit: mm



BSTC**

	(Pmax)	690W	695W	700W	705W	710W
Maximum Power	(Pmax)	690W	695W	700W	705W	710W
Optimum Operating Voltage	(Vmp)	37.86V	38.03V	38.19V	38.35V	38.51V
Optimum Operating Current	(Imp)	18.23A	18.28A	18.33A	18.39A	18.44A
Open Circuit Voltage	(Voc)	45.13V	45.30V	45.48V	45.65V	45.82V
Short Circuit Current	(Isc)	19.11A	19.16A	19.21A	19.27A	19.32A

**BSTC: Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM=1.5, ambient temperature 25 °C.

Shipping Configurations

Container Size	HC
Pallets Per Container	40'
Modules Per Pallet (pcs)	18
Modules Per Container (pcs)	31
Modules Per Container (pcs)	558

Electrical Characteristics (STC*)

Model	GSPV-M10/108H-430W	GSPV-M10/108H-435W	GSPV-M10/108H-440W	GSPV-M10/108H-445W	GSPV-M10/108H-450W
Maximum Power (Pmax)	625W	630W	635W	640W	645W
Module Efficiency (%)	22.08%	22.26%	22.44%	22.61%	22.79%
Optimum Operating Voltage (Vmp)	37.86V	38.03V	38.19V	38.35V	38.51V
Optimum Operating Current (Imp)	16.51A	16.57A	16.63A	16.69A	16.75A
Open Circuit Voltage (Voc)	45.13V	45.30V	45.48V	45.65V	45.82V
Short Circuit Current (Isc)	17.31A	17.37A	17.43A	17.49A	17.55A
Operating Module Temperature	-40 to +85 °C				
Maximum System Voltage	DC1500V (IEC)				
Maximum Series Fuse	30A				
Power Tolerance	0~+5W				
Bifaciality	85% ± 5%				

*STC: Irradiance 1000 W/m², cell temperature 25 °C, AM=1.5. Tolerance of Pmax is within +/- 3%.

Temperature Characteristics

Nominal Operating Cell Temp. (NOCT)	44 °C ± 2 °C
Temperature Coefficient of Pmax	-0.26%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	0.04%/°C

Mechanical Characteristics

Cell Type	HJT Mono 210 × 105mm
Cell Connection	120 (6 × 20)
Module Dimension	2172 × 1303 × 35 mm
Weight	35.3 kg
Junction Box	IP68
Output Cable	4mm ² , 300mm in length, length can be customized / UV resistant
Connectors Type	MC4 original / MC4 compatible
Frame	Anodised aluminum alloy
Front Load	5400 Pa
Rear Load	2400 Pa
Glass Thickness	Double glass, 2.0mm

Safety & Warranty

Safety Class	Class II
Product Warranty	15 yrs Workmanship
Performance Warranty	30 yrs Linear Warranty*

* Less than 1% attenuation in the 1st year, the annual attenuation from the 2nd year is no more than 0.375%, and the power is no less than 88% until the 30th year.